


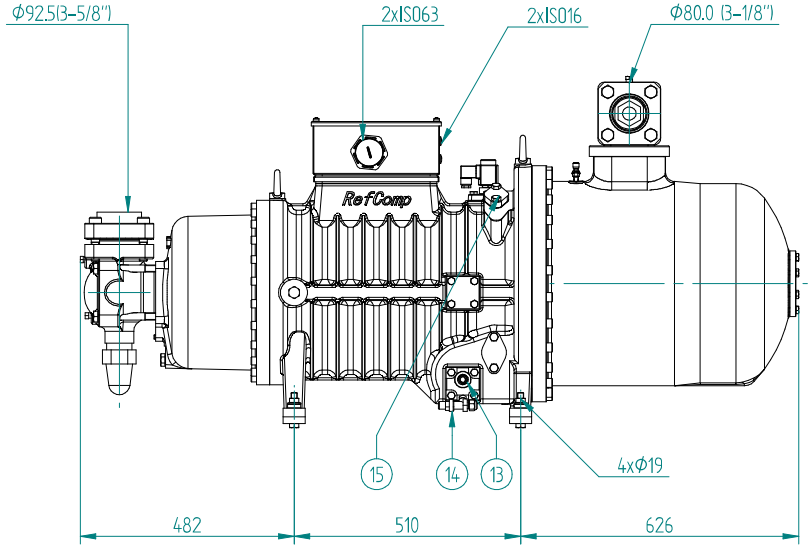


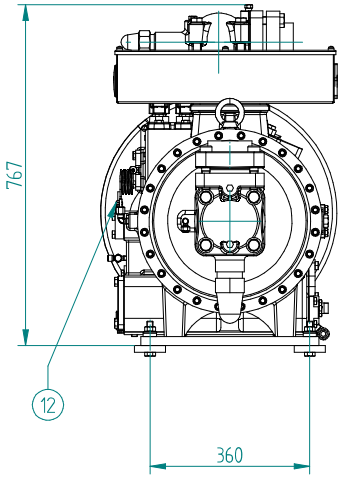

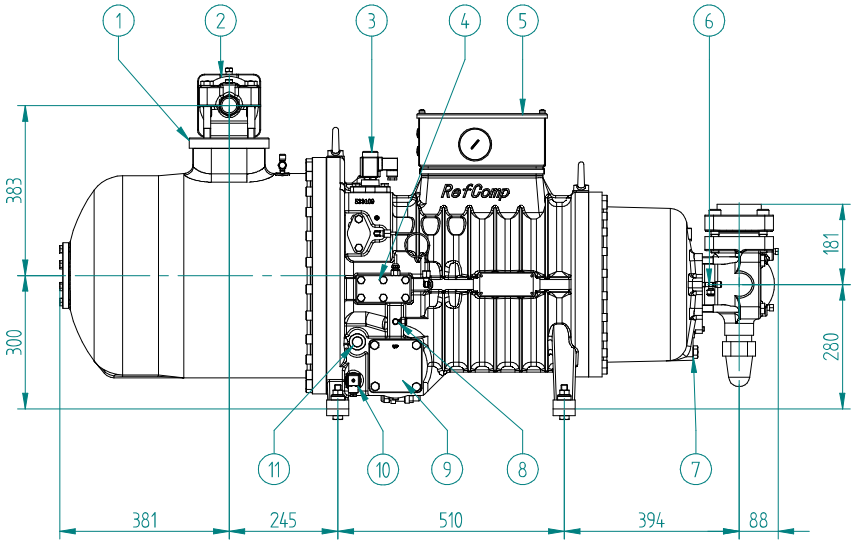

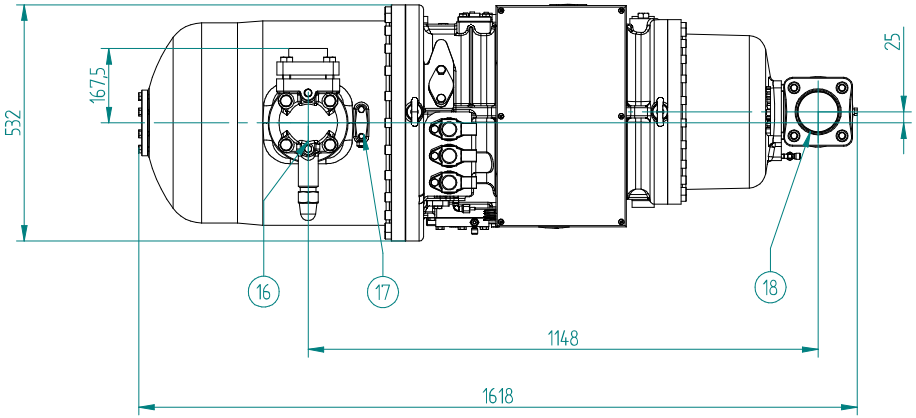

Key :

1-Non return valve
2-Solenoid valve connection (step-less capacity control)
3-Solenoid valves for part-load operation
4-Oil cooling connection 5/8"SAE-FLARE (optional)
5-Electrical box
6-Low pressure gas 1/4" SAE-FLARE
7-Oil drain motor housing
8-Oil pressure 1/4" SAE-FLARE
9-Oil filter
10-Crankase heater
11-Oil sight glass
12-Discharge temperature sensor 1/8"NPT
13-Oil level control (optional)
14-Oil fill/drain valve 3/8" SAE-FLARE
15-Liquid injection Φ10/Eco connectionΦ28 (optional)
16-Discharge shut-off valve
17-High pressure gas 1/4" SAE-FLARE
18-Suction shut-off valve

Diseg. - Draftman:	A.Tozzo	Sostit. - Substitute:	-		
Appr. - Approved:	-	Scala - Scale:	1:1	Peso - Weight:	-
RefComp		Descrizione - Description:	SRC-S 353 ~ SRC-S 413 ~ SRC-S 463		
SRM Italy s.r.l. Via E. Majorana, 10/12 36045 Lonigo (VI) Italy		Modello - Model: Screw Compressor		Progetto - Project: -	
Codice - Code	MSI001	Rev. - Index	-	Data - Date	20/10/2025
Tavola - Sheet	1/1				

ATTENZIONE: il presente disegno è di esclusiva proprietà di SRM ITALY s.r.l. E' fatto divieto di riproduzione e di divulgazione anche parziale secondo quanto regolato dalla norma di legge in vigore.
ATTENTION: The present drawing is exclusively ownership of SRM ITALY s.r.l. It is forbidden to reproduce and to disclose, even if partially, the present document in conformity to law regulation in force.