ENGINEERING
TOMORROW


Installation guide

Tube-in-tube heat exchanger
HE

015R9711

015R9711


Refrigerants:




R22, R1270*, R134a, R290*, R404A, R407A, R407C, R407F, R448A, R449A, R450A, R452A, R507A, R513A, R600*, R600a*

*) Applicable for HE 0.5, HE 1.0 and HE 1.5 only.

For complete list of approved refrigerants, visit **www.products.danfoss.com** and search for individual code numbers, where refrigerants are listed as part of technical data.

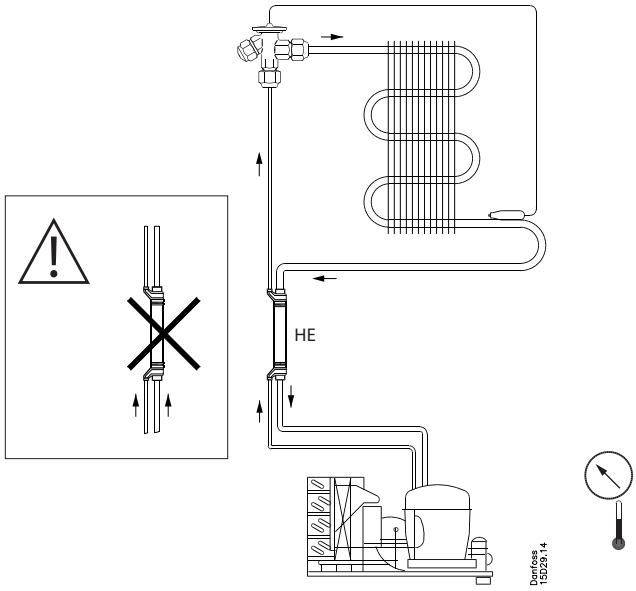

Type	HE 0.5, HE 1.0, HE 1.5	HE 4.0	HE 8.0
Max. working pressure PS/MWP	35 bar/507 psig	28 bar/406 psig	21.5 bar/311 psig
Max. test pressure (one time)	52 bar/754 psig	40 bar/580 psig	32 bar/464 psig
Temperature range	from -60 to 120 °C (from -76 to 248°F)		

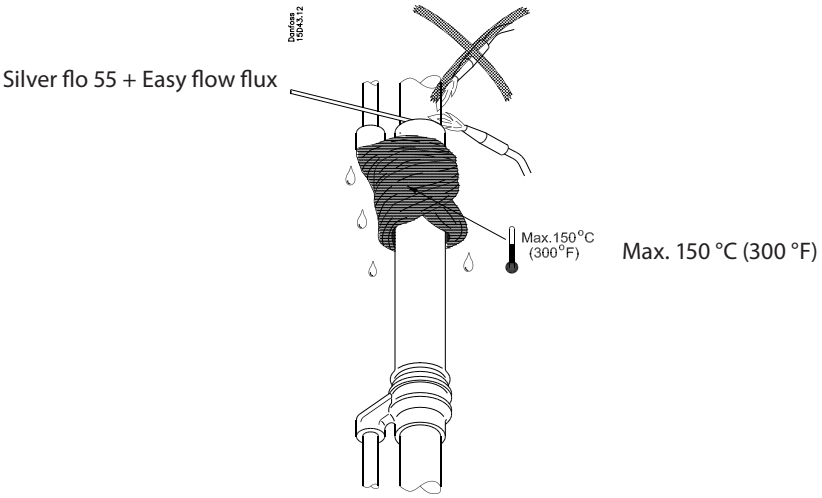

Danfoss A/S
Climate Solutions • danfoss.com • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material.
Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.
All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.